

## Citroen C4L Car GPS Navigation Entertainment System

### Installation manual and cautions

#### Installation Steps



1. The Citroen C4L car appearance



2. The dashboard



3. Combined sleeve, plastic crow plate, 3M electrical adhesive, 3M adhesive, cotton and screwdriver



4. With a knife machine align the fixed air-conditioning window buckle, and pull out the buckle



5. With a knife machine align the fixed air-conditioning window buckle, and pull out the buckle



6. Remove the air conditioner panel




7. The effect after removed the panel



8. Pry the display panel



9. Take out the display panel



10. Take out all connection cables from display panel



11. The effect after removed the



12. Put the decorative plate out of the original car under panel



13. The effect



14. The decorative plate from under the original control panel - positive and negative view



15. Remove the 6 screws with T20 screwdriver




16. Remove the original control panel



17. Take off the connection cables



18. Remove the 2 fixed screws on the device



19. Take off the connection cables




20. The effect after removed the CD machine




21. Remove the 2 fixed screws under the panel



22. Remove the screws and remove U type decorative frame



23. Our special car DVD player



24. Note: Before install on the screen pls first install our supporting gasket, tear and affixed to the red circle diagram portion (each left and right 2pcs )



25. Our special screen mounted on the original car control panel and with 2 screws fixing



26. After mounted on the screen- positive view



27. Connect the wires from the host to screen



28. Connect all wires



29. Installed our CD machine and fixed 2 screws



30. Put the display screen the connection plug, and connect the original car control panel plug



31. Installed display screen and fixed screws



32. The effect after installed our display screen




33. Put the display screen the connection plug, and connect the original car control panel plug



34. The effect after installed our special car DVD player

#### Inspection and confirmation

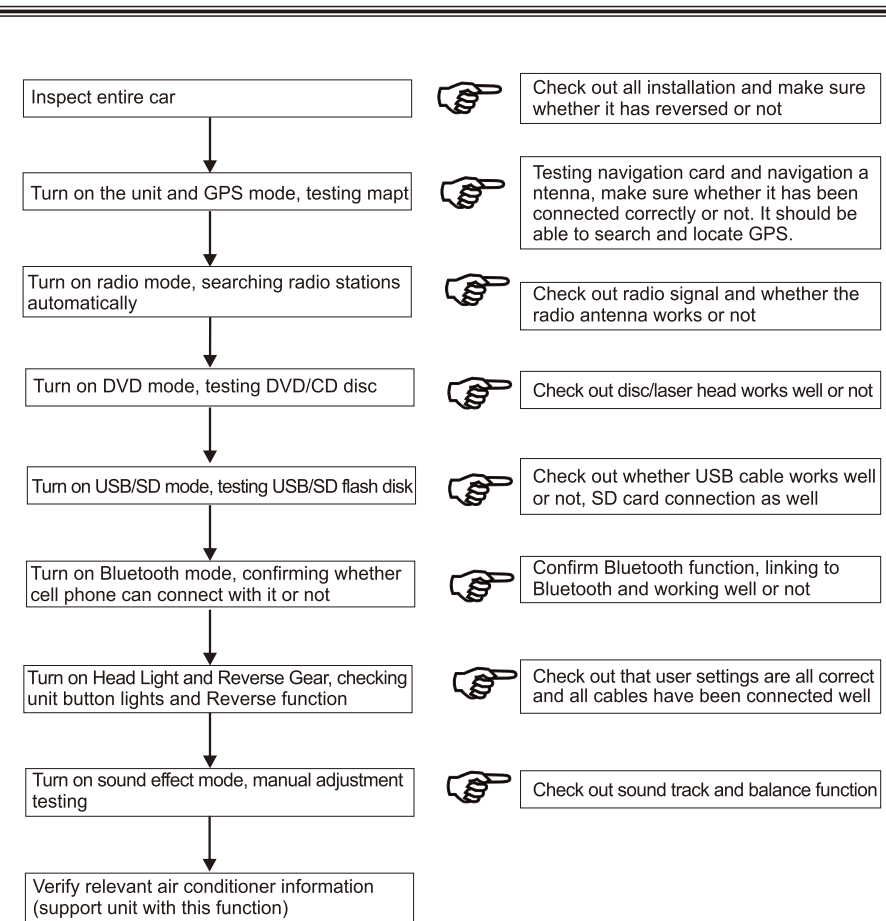

#### Notice

##### 1. The installation requirements

1.1. In order to ensure the safety and usage of the product, please commissioned by professional technicians for installation. In addition, to avoid damage and accident, please do not disassemble the host privately.

1.2. Before installation, please start the engine to check the dashboard function display and button operation whether is normal; The car inside and outside surface whether have the squandering phenomenon, please reflect to customers if have any problems.

1.3. To prevent damage to the seat or interior trim, the installers should put down metal goods and other hard objects before installation.

1.4. To avoid squandering the car dashboard, please pay attention to put away the car components when install. In the same time, the wiring debris should be deal with in time and don't stay in the car. Moreover, the cable joints must be insulated to prevent short circuits.

1.5. The wire arrangement must be reasonable. Normally, the space for installation is limited, it is recommended to reduce the unnecessary wirings to make the head unit easy to install and access. The cables and wirings to the head unit (e.g. GPS antenna, iPod cable, reversing camera cable, etc.) must be routed properly to avoid touching any moving parts, such as steering wheel column, acceleration pedal and brake pedal. All the cables must be bonded properly to against any loose during driving.

1.6. To avoid damage the host or accessory, please don't disconnect the harness and accessory when the host turn on.

1.7. If need to install the reverse camera, please enter into the setting menu to choose reverse power on.

##### 2. Navigation antenna position requirements

2.1. Please route the GPS antenna cable and power cable individually, and keep them away from the data cable to against any signal interference. The GPS antenna is recommended to be installed on the roof for better signal reception, it can also be fixed inside the car such as lower part of the front windscreen with 3M double side sticky tape.

2.2. To obtain better signal reception, the antenna must be positioned horizontally facing the sky. Any window tint may affect the GPS signal reception, it is recommended to cut the tint above the antenna off to get better GPS signal reception.

2.3. After installation, process the GPS positioning signal receiving adjustment.

**Important warning: In order to avoid damage the map data, the map is prohibited to pull out when the map is in running.**

##### 3. The host usage notice

3.1. Please do not allow the screen to suffer the moisture, dust, vapor, smoke this pollution.

3.2. Please do not use thinner or other chemical cleaner to wipe the screen; customers should use soft cloth to wipe the dirt in the screen.

3.3. To avoid damage the screen, please use the touch pen to operate on a touch screen, and can not use sharp objects to operate the host.