



Mitsubishi ASX Car GPS Navigation Entertainment System

Installation manual and cautions


Installation Steps




1. The Mitsubishi ASX car appearance




2. The dashboard




3. Combined sleeve, plastic crow plate, 3M electrical adhesive, 3M adhesive, cotton and screwdriver




4. Use a crow plate pry the frame from dashboard




5. The effect after removed the frame




6. Pray the frame, and take off all connection cables



7. Remove the 6 screws like above



8. Remove the left and right sides 2 fixing bracket screws (The bracket will install on our CD machine)



9. The effect after removed



10. Our special car DVD player



11. The removed bracket install on our CD machine, left and right each 1pcs



12. Remove the original vehicle warning lamp / air gate, mounted on our control panel



13. Mounted air gate




14. Install display screen silver trim (each left and right 1pcs)



15. The effect after installed our DVD player

Inspection and confirmation

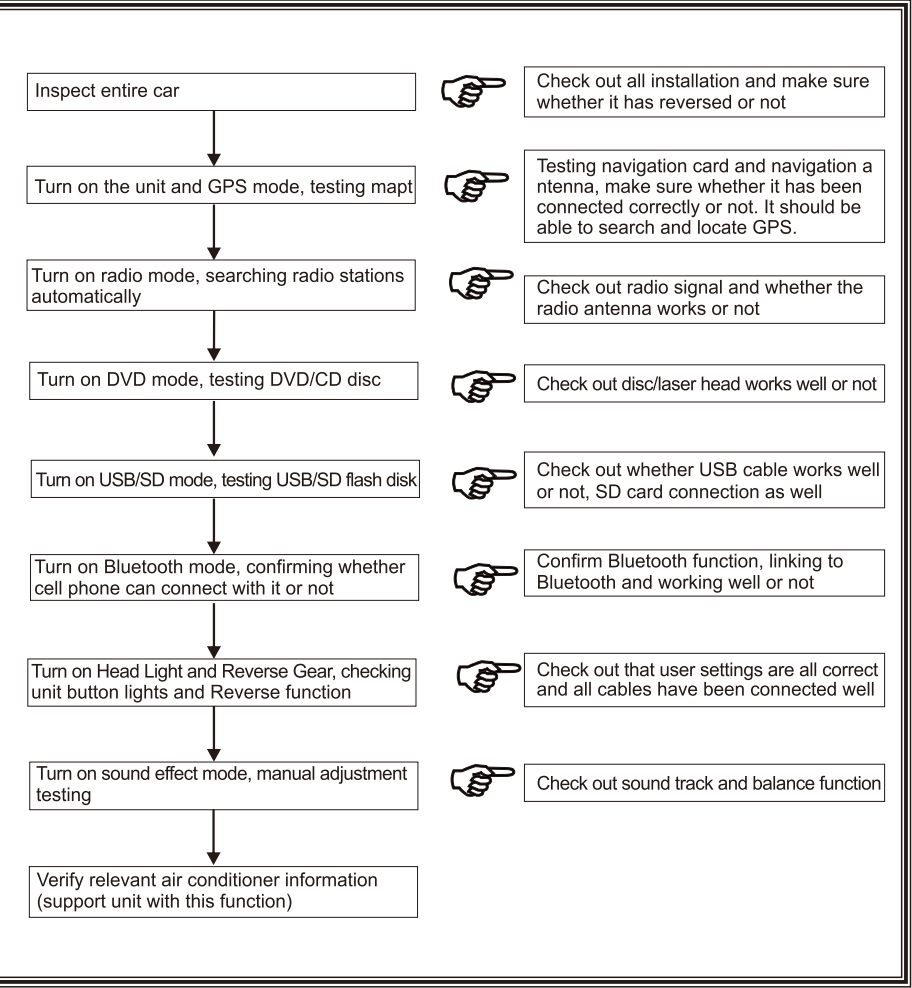

Notice

1. The installation requirements

1.1. In order to ensure the safety and usage of the product, please commissioned by professional technicians for installation. In addition, to avoid damage and accident, please do not disassemble the host privately.

1.2. Before installation, please start the engine to check the dashboard function display and button operation whether is normal; The car inside and outside surface whether have the squandering phenomenon, please reflect to customers if have any problems.

1.3. To prevent damage to the seat or interior trim, the installers should put down metal goods and other hard objects before installation.

1.4. To avoid squandering the car dashboard, please pay attention to put away the car components when install. In the same time, the wiring debris should be deal with in time and don't stay in the car. Moreover, the cable joints must be insulated to prevent short circuits.

1.5. The wire arrangement must be reasonable. Normally, the space for installation is limited, it is recommended to reduce the unnecessary wirings to make the head unit easy to install and access. The cables and wirings to the head unit (e.g. GPS antenna, iPod cable, reversing camera cable, etc.) must be routed properly to avoid touching any moving parts, such as steering wheel column, acceleration pedal and brake pedal. All the cables must be bonded properly to against any loose during driving.

1.6. To avoid damage the host or accessory, please don't disconnect the harness and accessory when the host turn on.

1.7. If need to install the reverse camera, please enter into the setting menu to choose reverse power on.

2. Navigation antenna position requirements

2.1. Please route the GPS antenna cable and power cable individually, and keep them away from the data cable to against any signal interference. The GPS antenna is recommended to be installed on the roof for better signal reception, it can also be fixed inside the car such as lower part of the front windscreen with 3M double side sticky tape.

2.2. To obtain better signal reception, the antenna must be positioned horizontally facing the sky. Any window tint may affect the GPS signal reception, it is recommended to cut the tint above the antenna off to get better GPS signal reception.

2.3. After installation , process the GPS positioning signal receiving adjustment.

Important warning: In order to avoid damage the map data, the map is prohibited to pull out when the map is in running.

3. The host usage notice

3.1. Please do not allow the screen to suffer the moisture, dust, vapor, smoke this pollution.

3.2. Please do not use thinner or other chemical cleaner to wipe the screen ; customers should use soft cloth to wipe the dirt in the screen.

3.3. To avoid damage the screen, please use the touch pen to operate on a touch screen, and can not use sharp objects to operate the host.